

**DL 3710 Pilot**


Lampada alogena bassa tensione  
Low voltage halogen lamp

599.3710.1.27.00.5	QT9	G4	1 x 10 W	INOX
--------------------	-----	----	----------	------

**DL 3710 Pilot**


Sorgente LED  
LED emitter

599.3710.1.L4.00.5	LED WHITE	1 x 1 W	INOX
599.3710.1.L5.00.5	LED BLU	1 x 1 W	INOX
599.3710.1.L6.00.5	LED GREEN	1 x 1 W	INOX

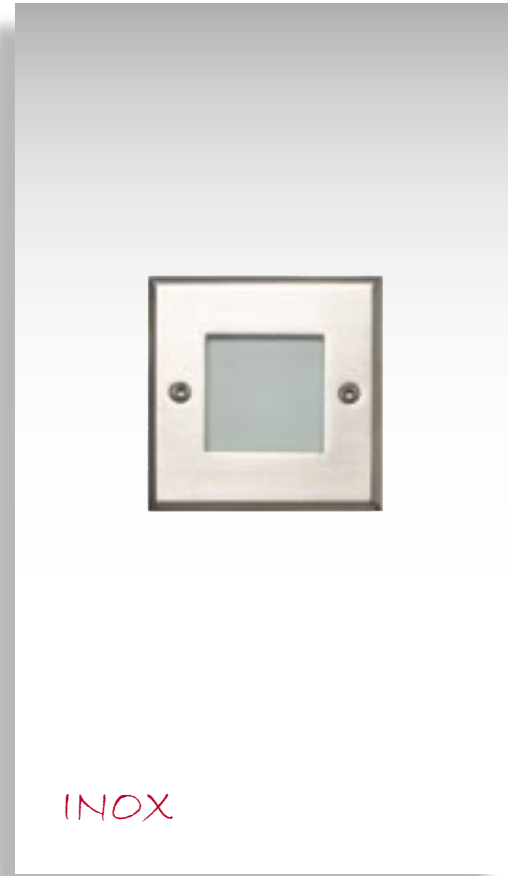

Scatola per installazione da incasso in poliammide inclusa  
Cavo di alimentazione uscente in silicone lunghezza 1,5 mt  
Vetro acidato di serie

Wall installation housing in polyamid included  
Pre-wired with 1,5 meters



CORPO IN PRESSOFUSIONE DI ALLUMINIO ADC12 VERNICIATO A POLVERE CON PRETRAT-  
TAMENTO SPECIALE PER ESTERNI  
ANELLO DI CHIUSURA IN ACCIAIO INOX SATINATO  
CASSAFORMA IN PA 6.6  
VITRO DI PROTEZIONE TEMPERATO  
VITERIA IN ACCIAIO INOX  
GUARNIZIONI IN GOMMA SILICONICA. TEMPERATURA DI SERVIZIO -40° +250°C

BODY IN HIGH-PRESSURE DIE-CAST ALUMINIUM ADC12 ALLOY POWDER COATED WITH  
PRETREATMENT FOR OUTDOOR USE  
FRONT COVER IN ANTI-CORROSION STAINLESS STEEL IN SATIN FINISHING  
WALL INSTALLATION HOUSING IN POLYAMID PA 6.6  
SAFETY TEMPERED GLASS  
STAINLESS STEEL SCREWS  
EATHER PROOF AND DURABLE SILICONE GASKET. SERVICE TEMPERATURE -40° +250°C