


DL 4176 Display

Lampada alogenuri metallici
Metal halide lamp

| | | | | | |
|-----------------------------------------------------------------------------------|--------------------|--------|-----|----------|-------|
|  | 599.4176.1.85.00.1 | HIT-CE | G12 | 1 x 35 W | BI/WH |
| | 599.4176.1.85.00.2 | HIT-CE | G12 | 1 x 35 W | NE/BK |
| | 599.4176.1.85.00.3 | HIT-CE | G12 | 1 x 35 W | GI/GR |
| | 599.4176.1.85.00.4 | HIT-CE | G12 | 1 x 35 W | AN/AN |
| | 599.4176.1.85.00.0 | HIT-CE | G12 | 1 x 35 W | AR/SI |


DL 4176 Display

Lampada fluorescente compatta
Compact fluorescent Lamp

| | | | | | |
|-----------------------------------------------------------------------------------|--------------------|------|--------|----------|-------|
|  | 599.4176.1.45.00.1 | TC-D | G24-d2 | 1 x 18 W | BI/WH |
| | 599.4176.1.45.00.2 | TC-D | G24-d2 | 1 x 18 W | NE/BK |
| | 599.4176.1.45.00.3 | TC-D | G24-d2 | 1 x 18 W | GI/GR |
| | 599.4176.1.45.00.4 | TC-D | G24-d2 | 1 x 18 W | AN/AN |
| | 599.4176.1.45.00.0 | TC-D | G24-d2 | 1 x 18 W | AR/SI |


DL 4176 Display

Lampada fluorescente compatta
Compact fluorescent Lamp

| | | | | | |
|-----------------------------------------------------------------------------------|--------------------|------|--------|----------|-------|
|  | 599.4176.1.46.00.1 | TC-D | G24-d3 | 1 x 26 W | BI/WH |
| | 599.4176.1.46.00.2 | TC-D | G24-d3 | 1 x 26 W | NE/BK |
| | 599.4176.1.46.00.3 | TC-D | G24-d3 | 1 x 26 W | GI/GR |
| | 599.4176.1.46.00.4 | TC-D | G24-d3 | 1 x 26 W | AN/AN |
| | 599.4176.1.46.00.0 | TC-D | G24-d3 | 1 x 26 W | AR/SI |


DL 4176 Display


Lampada fluorescente compatta elettronica
Electronic fluorescent lamp

| | | | | | |
|-----------------------------------------------------------------------------------|--------------------|--------|-----|----------|-------|
|  | 599.4176.1.53.00.1 | TC-TSE | E27 | 1 x 15 W | BI/WH |
| | 599.4176.1.53.00.2 | TC-TSE | E27 | 1 x 15 W | NE/BK |
| | 599.4176.1.53.00.3 | TC-TSE | E27 | 1 x 15 W | GI/GR |
| | 599.4176.1.53.00.4 | TC-TSE | E27 | 1 x 15 W | AN/AN |
| | 599.4176.1.53.00.0 | TC-TSE | E27 | 1 x 15 W | AR/SI |


DL 4176 Display

Lampada alogena
Halogen Lamp


| | | | | | |
|-------------------------------------------------------------------------------------|--------------------|------|-----|----------|-------|
|  | 599.4176.1.23.00.1 | QT32 | E27 | 1 x 60 W | BI/WH |
| | 599.4176.1.23.00.2 | QT32 | E27 | 1 x 60 W | NE/BK |
| | 599.4176.1.23.00.3 | QT32 | E27 | 1 x 60 W | GI/GR |
| | 599.4176.1.23.00.4 | QT32 | E27 | 1 x 60 W | AN/AN |
| | 599.4176.1.23.00.0 | QT32 | E27 | 1 x 60 W | AR/SI |



HIT-CE G12 35W



TC-D G24d-2 18W

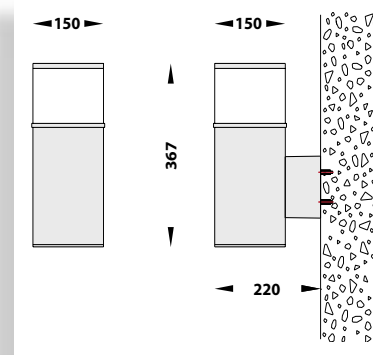

CORPO IN ALLUMINIO ESTRUSO S6063
COPERCHI E BASE DI FISSAGGIO IN PRESSOFUSIONE DI ALLUMINIO ADC12 VERNICIATO A POLVERE CON PRETRATTAMENTO SPECIALE PER ESTERNI
DIFFUSORE IN POLICARBONATO AUTOESTINGUENTE STABILIZZATO UV
SELF-EXTINGUISHING IMPACT RESISTANT POLYCARBONATE DIFFUSER WITH UV STABILIZED ADDITIVE
RIFLETTORE IN ALLUMINIO PURISSIMO
VITERIA IN ACCIAIO INOX
GUARNIZIONI IN GOMMA SILICONICA. TEMPERATURA DI SERVIZIO -40° +250°C

BODY IN CORROSION RESISTANT EXTRUSION ALUMINIUM S6063
COVERS AND WALL BRACKET IN HIGH-PRESSURE DIE-CAST ALUMINIUM ADC12 ALLOY POWDER COATED WITH PRETREATMENT FOR OUTDOOR USE
HIGH PURITY ALUMINIUM REFLECTOR
STAINLESS STEEL SCREWS
WEATHER PROOF AND DURABLE SILICONE GASKET. SERVICE TEMPERATURE -40° +250°C