



DL 3921 Kappa

Lampada fluorescente compatta
Compact fluorescent Lamp

	599.3921.2.41.00.1	TC	G23	2 x 9 W	BI/WH
	599.3921.2.41.00.2	TC	G23	2 x 9 W	NE/BK
	599.3921.2.41.00.3	TC	G23	2 x 9 W	GI/GR
	599.3921.2.41.00.4	TC	G23	2 x 9 W	AN/AN
	599.3921.2.41.00.0	TC	G23	2 x 9 W	AR/SI

DL 3921 Kappa

Lampada fluorescente compatta
Compact fluorescent Lamp

	599.3921.1.45.00.1	TC-D	G24-d2	1 x 18 W	BI/WH
	599.3921.1.45.00.2	TC-D	G24-d2	1 x 18 W	NE/BK
	599.3921.1.45.00.3	TC-D	G24-d2	1 x 18 W	GI/GR
	599.3921.1.45.00.4	TC-D	G24-d2	1 x 18 W	AN/AN
	599.3921.1.45.00.0	TC-D	G24-d2	1 x 18 W	AR/SI


DL 3921 Kappa



Lampada fluorescente compatta elettronica
Electronic fluorescent Lamp

	599.3921.1.53.00.1	TC-TSE	E27	1 x 15 W	BI/WH
	599.3921.1.53.00.2	TC-TSE	E27	1 x 15 W	NE/BK
	599.3921.1.53.00.3	TC-TSE	E27	1 x 15 W	GI/GR
	599.3921.1.53.00.4	TC-TSE	E27	1 x 15 W	AN/AN
	599.3921.1.53.00.0	TC-TSE	E27	1 x 15 W	AR/SI


DL 3921 Kappa

Lampada incandescenza
Standard incandescent lamp


	599.3921.1.02.00.1	A60	E27	1 x 60 W	BI/WH
	599.3921.1.02.00.2	A60	E27	1 x 60 W	NE/BK
	599.3921.1.02.00.3	A60	E27	1 x 60 W	GI/GR
	599.3921.1.02.00.4	A60	E27	1 x 60 W	AN/AN
	599.3921.1.02.00.0	A60	E27	1 x 60 W	AR/SI



TC G23 2x9W



TC-D G24d-2 18W




A60 E27 60W




CORPO E ANELLO IN PRESSOFUSIONE DI ALLUMINIO ADC12 VERNICIATO A POLVERE CON PRETRATTAMENTO SPECIALE PER ESTERNI
DIFFUSORE IN POLICARBONATO AUTOESTINGUENTE STABILIZZATO UV
VITERIA IN ACCIAIO INOX
GUARNIZIONI IN GOMMA SILICONICA. TEMPERATURA DI SERVIZIO -40° +250°C

BODY AND FRONT COVER IN HIGH-PRESSURE DIE-CAST ALUMINIUM ADC12 ALLOY POWDER COATED WITH PRETREATMENT FOR OUTDOOR USE
SELF-EXTINGUISHING POLYCARBONATE DIFFUSER WITH UV STABILIZED ADDITIVE STAINLESS STEEL SCREWS
WEATHER PROOF AND DURABLE SILICONE GASKET.
SERVICE TEMPERATURE -40° +250°C




DL 3922 Kappa

Lampada fluorescente compatta elettronica
Electronic fluorescent Lamp

	599.3922.1.54.00.1	TC-TSE	E27	1 x 23 W	BI/WH
	599.3922.1.54.00.2	TC-TSE	E27	1 x 23 W	NE/BK
	599.3922.1.54.00.3	TC-TSE	E27	1 x 23 W	GI/GR
	599.3922.1.54.00.4	TC-TSE	E27	1 x 23 W	AN/AN
	599.3922.1.54.00.0	TC-TSE	E27	1 x 23 W	AR/SI


DL 3922 Kappa

Lampada alogena
Halogen Lamp

	599.3922.1.24.00.1	QT32	E27	1 x 100 W	BI/WH
	599.3922.1.24.00.2	QT32	E27	1 x 100 W	NE/BK
	599.3922.1.24.00.3	QT32	E27	1 x 100 W	GI/GR
	599.3922.1.24.00.4	QT32	E27	1 x 100 W	AN/AN
	599.3922.1.24.00.0	QT32	E27	1 x 100 W	AR/SI


DL 3922 Kappa




Lampada fluorescente compatta
Compact fluorescent Lamp

	599.3922.2.46.00.1	TC-D	G24-d3	2 x 26 W	BI/WH
	599.3922.2.46.00.2	TC-D	G24-d3	2 x 26 W	NE/BK
	599.3922.2.46.00.3	TC-D	G24-d3	2 x 26 W	GI/GR
	599.3922.2.46.00.4	TC-D	G24-d3	2 x 26 W	AN/AN
	599.3922.2.46.00.0	TC-D	G24-d3	2 x 26 W	AR/SI


DL 3922 Kappa

Lampada fluorescente compatta
Compact fluorescent Lamp

	599.3922.2.52.00.1	TC-TEL	GX24-q4	2 x 42 W	BI/WH
	599.3922.2.52.00.2	TC-TEL	GX24-q4	2 x 42 W	NE/BK
	599.3922.2.52.00.3	TC-TEL	GX24-q4	2 x 42 W	GI/GR
	599.3922.2.52.00.4	TC-TEL	GX24-q4	2 x 42 W	AN/AN
	599.3922.2.52.00.0	TC-TEL	GX24-q4	2 x 42 W	AR/SI

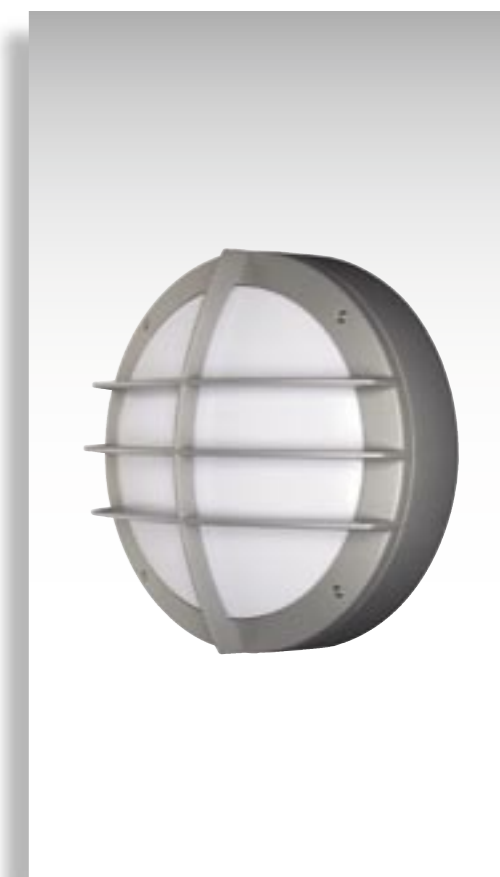

QT32 E27 100W



TC-D G24d-3 2x26W



CORPO E ANELLO IN PRESSOFUSIONE DI ALLUMINIO ADC12 VERNICIATO A POLVERE CON PRETRATTAMENTO SPECIALE PER ESTERNI
DIFFUSORE IN POLICARBONATO AUTOESTINGUENTE STABILIZZATO UV
VITERIA IN ACCIAIO INOX
GUARNIZIONI IN GOMMA SILICONICA. TEMPERATURA DI SERVIZIO -40° +250°C

BODY AND FRONT COVER IN HIGH-PRESSURE DIE-CAST ALUMINIUM ADC12 ALLOY POWDER COATED WITH PRETREATMENT FOR OUTDOOR USE
SELF-EXTINGUISHING POLYCARBONATE DIFFUSER WITH UV STABILIZED ADDITIVE STAINLESS STEEL SCREWS
WEATHER PROOF AND DURABLE SILICONE GASKET.
SERVICE TEMPERATURE -40° +250°C