



DL 2000 Major
Lampada fluorescente lineare
Linear fluorescent lamp

	599.2000.1.30.00.1	T5	G5	1 x 14 W	BI/WH
	599.2000.1.30.00.2	T5	G5	1 x 14 W	NE/BK
	599.2000.1.30.00.3	T5	G5	1 x 14 W	GI/GR
	599.2000.1.30.00.4	T5	G5	1 x 14 W	AN/AN
	599.2000.1.30.00.0	T5	G5	1 x 14 W	AR/SI

DL 2000 Major
Lampada fluorescente lineare
Linear fluorescent lamp

	599.2000.1.31.00.1	T5	G5	1 x 21 W	BI/WH
	599.2000.1.31.00.2	T5	G5	1 x 21 W	NE/BK
	599.2000.1.31.00.3	T5	G5	1 x 21 W	GI/GR
	599.2000.1.31.00.4	T5	G5	1 x 21 W	AN/AN
	599.2000.1.31.00.0	T5	G5	1 x 21 W	AR/SI

DL 2000 Major
Lampada fluorescente lineare
Linear fluorescent lamp

	599.2000.1.33.00.1	T5	G5	1 x 28 W	BI/WH
	599.2000.1.33.00.2	T5	G5	1 x 28 W	NE/BK
	599.2000.1.33.00.3	T5	G5	1 x 28 W	GI/GR
	599.2000.1.33.00.4	T5	G5	1 x 28 W	AN/AN
	599.2000.1.33.00.0	T5	G5	1 x 28 W	AR/SI

DL 2000 Major
Lampada fluorescente lineare
Linear fluorescent lamp

	599.2000.1.34.00.1	T5	G5	1 x 35 W	BI/WH
	599.2000.1.34.00.2	T5	G5	1 x 35 W	NE/BK
	599.2000.1.34.00.3	T5	G5	1 x 35 W	GI/GR
	599.2000.1.34.00.4	T5	G5	1 x 35 W	AN/AN
	599.2000.1.34.00.0	T5	G5	1 x 35 W	AR/SI

DL 2000 Major
Lampada fluorescente lineare
Linear fluorescent lamp

	599.2000.1.37.00.1	T8	G13	1 x 18 W	BI/WH
	599.2000.1.37.00.2	T8	G13	1 x 18 W	NE/BK
	599.2000.1.37.00.3	T8	G13	1 x 18 W	GI/GR
	599.2000.1.37.00.4	T8	G13	1 x 18 W	AN/AN
	599.2000.1.37.00.0	T8	G13	1 x 18 W	AR/SI

DL 2000 Major
Lampada fluorescente lineare
Linear fluorescent lamp

	599.2000.1.38.00.1	T8	G13	1 x 36 W	BI/WH
	599.2000.1.38.00.2	T8	G13	1 x 36 W	NE/BK
	599.2000.1.38.00.3	T8	G13	1 x 36 W	GI/GR
	599.2000.1.38.00.4	T8	G13	1 x 36 W	AN/AN
	599.2000.1.38.00.0	T8	G13	1 x 36 W	AR/SI

DL 2000 Distribuzione simmetrica
Symmetrical light distribution

DL 2001 Distribuzione asimmetrica
Asymmetrical light distribution

DL 2001 Major
Lampada fluorescente lineare
Linear fluorescent lamp

	599.2001.1.30.00.1	T5	G5	1 x 14 W	BI/WH
	599.2001.1.30.00.2	T5	G5	1 x 14 W	NE/BK
	599.2001.1.30.00.3	T5	G5	1 x 14 W	GI/GR
	599.2001.1.30.00.4	T5	G5	1 x 14 W	AN/AN
	599.2001.1.30.00.0	T5	G5	1 x 14 W	AR/SI

DL 2001 Major
Lampada fluorescente lineare
Linear fluorescent lamp

	599.2001.1.31.00.1	T5	G5	1 x 21 W	BI/WH
	599.2001.1.31.00.2	T5	G5	1 x 21 W	NE/BK
	599.2001.1.31.00.3	T5	G5	1 x 21 W	GI/GR
	599.2001.1.31.00.4	T5	G5	1 x 21 W	AN/AN
	599.2001.1.31.00.0	T5	G5	1 x 21 W	AR/SI

DL 2001
Lampada fluorescente lineare
Linear fluorescent lamp

	599.2001.1.33.00.1	T5	G5	1 x 28 W	BI/WH
	599.2001.1.33.00.2	T5	G5	1 x 28 W	NE/BK
	599.2001.1.33.00.3	T5	G5	1 x 28 W	GI/GR
	599.2001.1.33.00.4	T5	G5	1 x 28 W	AN/AN
	599.2001.1.33.00.0	T5	G5	1 x 28 W	AR/SI

DL 2001 Major
Lampada fluorescente lineare
Linear fluorescent lamp



	599.2001.1.34.00.1	T5	G5	1 x 35 W	BI/WH
	599.2001.1.34.00.2	T5	G5	1 x 35 W	NE/BK
	599.2001.1.34.00.3	T5	G5	1 x 35 W	GI/GR
	599.2001.1.34.00.4	T5	G5	1 x 35 W	AN/AN
	599.2001.1.34.00.0	T5	G5	1 x 35 W	AR/SI

DL 2001 Major
Lampada fluorescente lineare
Linear fluorescent lamp

	599.2001.1.37.00.1	T8	G13	1 x 18 W	BI/WH
	599.2001.1.37.00.2	T8	G13	1 x 18 W	NE/BK
	599.2001.1.37.00.3	T8	G13	1 x 18 W	GI/GR
	599.2001.1.37.00.4	T8	G13	1 x 18 W	AN/AN
	599.2001.1.37.00.0	T8	G13	1 x 18 W	AR/SI

DL 2001 Major
Lampada fluorescente lineare
Linear fluorescent lamp

	599.2001.1.38.00.1	T8	G13	1 x 36 W	BI/WH
	599.2001.1.38.00.2	T8	G13	1 x 36 W	NE/BK
	599.2001.1.38.00.3	T8	G13	1 x 36 W	GI/GR
	599.2001.1.38.00.4	T8	G13	1 x 36 W	AN/AN
	599.2001.1.38.00.0	T8	G13	1 x 36 W	AR/SI

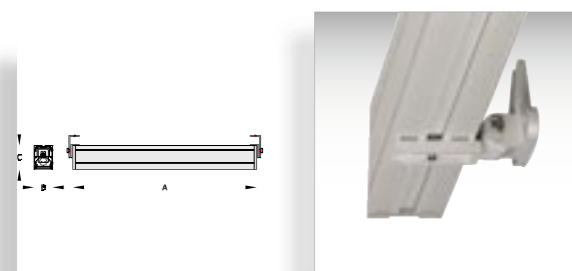

CORPO IN ALLUMINIO ESTRUSO S6063
COPERCHI E BASE DI FISSAGGIO IN PRESSOFUSIONE DI ALLUMINIO ADC12
VERNICIATO A POLVERE CON PRETRATTAMENTO SPECIALE PER ESTERNI
VETRO DI PROTEZIONE TEMPERATORIFLETTORE IN ALLUMINIO PURISSIMO
VITERIA IN ACCIAIO INOX
GUARNIZIONI IN GOMMA SILICONICA. TEMPERATURA DI SERVIZIO -40° +250°C

BODY IN CORROSION RESISTANT EXTRUSION ALUMINIUM S6063
COVERS AND WALL BRACKET IN HIGH-PRESSURE DIE-CAST ALUMINIUM ADC12
ALLOY POWDER COATED WITH PRETREATMENT FOR OUTDOOR USE
SAFETY TEMPERED GLASS
HIGH PURITY ALUMINIUM REFLECTOR
STAINLESS STEEL SCREWS
WEATHER PROOF AND DURABLE SILICONE GASKET.
SERVICE TEMPERATURE -40° +250°C

