




■ **lyras 130**
pagg. 60-63



art.
460

design **A. Dolcetti**

OHIM:
patent No.
000346366-0003



down light
or up light



COLOURS

nhg all

corpo **alluminio pressofuso**
body **in die casting aluminium**
corps **en aluminium moulé**
sous pression
cuerpo **aluminio inyectado**
Körper **aus Aluminium-
Druckguss**

diffusore **vetro trasparente**
diffuser **glass transparent**
diffuser **verre transparent**
difusor **vidrio transparente**
Diffuser **Glas klar**



up and
down light





COLOURS











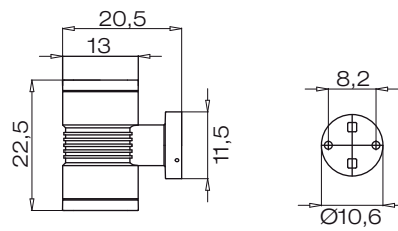


nhg all


















For technical details visit
www.landa.it

IP66 



EASY INSTALLATION

Art.		W	V	Type		LUX at 1mt
460LS12X1		12°	1 X 12	240	6000°K 780LM	4000
460LS12X1H					3500°K 660LM	3400
460LL12X1		40°	1 X 12	240	6000°K 780LM	850
460LL12X1H					3500°K 660LM	700
460F18		-60°/+60°	1 X 18		TC-T / GX24 q-2	
460GU10X1			1 X 50		GU10	
460GU5.3X1			1 X 50	12	no transformer GU5,3	
460BT50X1			1 X 50		with transformer GU5,3	
460G9X1			1 X 60		G9	
460H20X1		-30°/+30°	1 X 20		PGJ5	
460H20X1S		-5°/+5°	1 X 20		PGJ5	


Art.		W	V	Type		LUX at 1mt
460LS12X2		12°+12°	2 X 12	240	6000°K 780LM	4000
460LS12X2H					3500°K 660LM	3400
460LL12X2		40°+40°	2 X 12	240	6000°K 780LM	850
460LL12X2H					3500°K 660LM	700
460LM12X2		40°+12°	2 X 12	240	6000°K 780LM	4000/850
460LM12X2H					3500°K 660LM	3400/700
460G9		-60°/+60°	1 X 75		G9	
460B15D			1 X 150		B15d	
460GU10X2			2 X 50		GU10	
460GU5.3X2			2 X 50	12	no transformer GU5,3	
460BT50X2			2 X 50		with transformer GU5,3	
460G9X2			2 X 60		G9	
460H20X2		-30°/+30°	2 X 20		PGJ5	
460H20X2S		-5°/+5°	2 X 20		PGJ5	
460H20X2M		-30°/+30° -5°/+5°	2 X 20		PGJ5	

ELECTRIFICATION





LED

dettagli /
details / details
detalles / details:
pages 4-5

Transformer not required



codeLS12 codeLL12





LED

Accessories on request:

Also available with:



cod. **0201007B**
vetro opale/opal glass/
verre opale/vidrio ópalo/
Glas opal




code **00K460.02**
Reflector for art. 460




code **00K460.01**
Visor for art. 460

LED

powered by Acriche SEOUL® LED
AC direct connection  230/240V
Transformer not required



example code:
art. | LED 12° |  | colour |
461 | LS12 | H | all
art. | electrification | colour |
461 | F18 | F18 | all

art.
461
462
463

design **A. Dolcetti**


OHIM:
patent No.
000346366-0003

corpo **alluminio pressofuso**
body **in die casting aluminium**
corps **en aluminium moulé**
sous pression
cuerpo **aluminio inyectado**
Körper **aus Aluminium-**
Druckguss




diffusore **vetro trasparente**
diffuser **glass transparent**
diffuser **verre transparent**
difusor **vidrio transparente**
Diffuser **Glas klar**





461



462

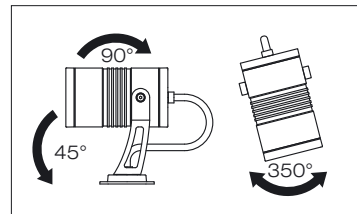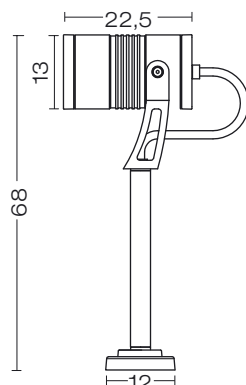













463




For technical details visit
www.landa.it

IP66 


Art.	Art.	Art.		W	V	Type		LUX at 1mt
461LS12X1	462LS12X1	463LS12X1		12	240	6000°K	780LM	4000
461LS12X1H	462LS12X1H	463LS12X1H				3500°K	660LM	3400
461LL12X1	462LL12X1	463LL12X1		40°		6000°K	780LM	850
461LL12X1H	462LL12X1H	463LL12X1H				3500°K	660LM	700
461F18	462F18	463F18	-60°/+60°	1 X 18		TC-T / GX24 q-2		
461GU5.3	462GU5.3	463GU5.3		1 X 50	12	no transformer	GU5,3	
461E27	462E27	463E27	-60°/+60°	1 X 21			E27	
461H20	462H20	463H20	-30°/+30°	1 X 20			PGJ5	
461H20S	462H20S	463H20S	-5°/+5°	1 X 20			PGJ5	

ELECTRIFICATION
LED
dettagli / details / details
detalles / details:
pages 4-5

Transformer not required



codeLS12



codeLL12

F18
1 x 18 W
GX24 q-2



GU5.3
1 x 50 W
GU5,3



E27
1 x 21 W
E27



H20
H20S
1 x 20 W
PGJ5





LED



Accessories on request:

Also available with:



cod. **0201007B**
vetro opale/opal glass/
verre opale/vidrio ópalo/
Glas opal



code **00K460.02**
Reflector for
art. 461-462-463



code **00A465**
Mounting spike for
art. 461-462



code **00K460.01**
Visor for
art. 461-462-463