

Kappadue Led

wall

Outdoor residential lighting Led

Designer: S. Bottari



Coated grey

Indoor and outdoor light fitting

Mono-emission or bi-emission wall washer light fitting for direct or indirect lighting

Colour

Coated grey
Black
Rust

Suitable for


Private and public areas

Special features

Extremely compact dimensions
Wall washer effect
Energy saving
Direct mains supply (mono-emission version)

Technical details

- Die cast aluminium base
- Die cast aluminium body
- Mono-emission with Led white 3 x 1W cold white (CW) or warm white (WW)
- Supply tension 220-240V 50-60Hz
- Bi-emission with 2 Led white 3 x 1W cold white (CW) or warm white (WW) 12V AC/DC supply
- Printed tempered glass diffuser
- Aluminium closing cap (mono-emission version)
- Stainless steel screws

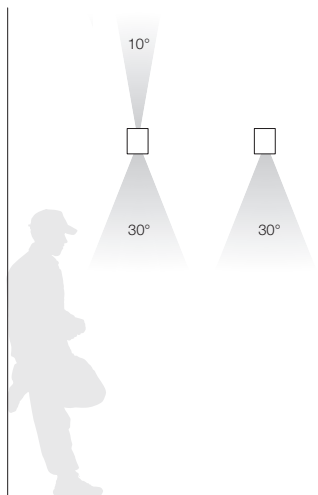

Kappadue mono-emission

Dimensions	Power		Coated Grey	Black	Rust	
90 x 98 x 92 mm	Led white CW	4.5W	0150.185G	0150.185N	0150.185J	1
	Led white WW	4.5W	0150.184G	0150.184N	0150.184J	1

Kappadue bi-emission

Dimensions	Power		Coated Grey	Black	Rust	
90 x 98 x 92 mm	Led white CW	9W	0152.185G *	0152.185N *	0152.185J *	1
	Led white WW	9W	0152.184G *	0152.184N *	0152.184J *	1

Accessories bi-emission

Ballast 16W 12V DC for supply tension 230-240V 50-60Hz	CS160010	1
Ballast 70W 12V DC for supply tension 230-240V 50-60Hz	CS160008	1

