
















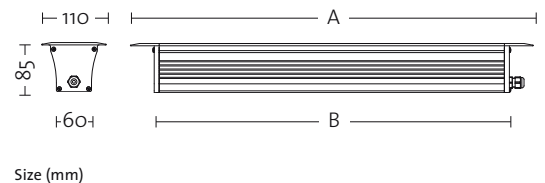
Floor-mounted recessed luminaire with LED light sources.  
 Anodised extruded aluminium profile structure.  
 Louver in tempered glass (8 mm).  
 Silicone material gaskets.  
 Ballast not included.

## TRACCIA LED

CODE	DESCRIPTION	
	<b>Module 500 mm for white light projection</b>	  
2640 BIN 10	10° beam, neutral white LED - 4200K	
2640 BIN 20	20° beam, neutral white LED - 4200K	
2640 BIN 30	30° beam, neutral white LED - 4200K	
2640 BIN ET	10°x 40° beam, neutral white LED - 4200K	
2640 BIC 10	10° beam, hot white LED - 3000K	
2640 BIC 20	20° beam, hot white LED - 3000K	
2640 BIC 30	30° beam, hot white LED - 3000K	
2640 BIC ET	10°x 40° beam, hot white LED - 3000K	
	9 LED - 12,6W total - 12Vdc Colour: 33 - IP 67 - IK09 - 1000 kg static load Ballast to be ordered separately. Provided with length of cable 1000 mm HO7RN-F 2x1 mm <sup>2</sup> , black	
	<b>Module 1000 mm for white light projection</b>	  
2641 BIN 10	10° beam, neutral white LED - 4200K	
2641 BIN 20	20° beam, neutral white LED - 4200K	
2641 BIN 30	30° beam, neutral white LED - 4200K	
2641 BIN ET	10°x 40° beam, neutral white LED - 4200K	
2641 BIC 10	10° beam, hot white LED - 3000K	
2641 BIC 20	20° beam, hot white LED - 3000K	
2641 BIC 30	30° beam, hot white LED - 3000K	
2641 BIC ET	10°x 40° beam, hot white LED - 3000K	
	18 LED - 25,2W total - 12Vdc Colour: 33 - IP 67 - IK09 - 1000 kg static load Ballast to be ordered separately. Provided with length of cable 1000 mm HO7RN-F 2x1 mm <sup>2</sup> , black	
	<b>Module 1500 mm for white light projection</b>	  
2642 BIN 10	10° beam, neutral white LED - 4200K	
2642 BIN 20	20° beam, neutral white LED - 4200K	
2642 BIN 30	30° beam, neutral white LED - 4200K	
2642 BIN ET	10°x 40° beam, neutral white LED - 4200K	
2642 BIC 10	10° beam, hot white LED - 3000K	
2642 BIC 20	20° beam, hot white LED - 3000K	
2642 BIC 30	30° beam, hot white LED - 3000K	
2642 BIC ET	10°x 40° beam, hot white LED - 3000K	
	27 LED - 37,8W total - 12Vdc Colour: 33 - IP 67 - IK09 - 1000 kg static load Ballast to be ordered separately. Provided with length of cable 1000 mm HO7RN-F 2x1 mm <sup>2</sup> , black	
414	12V - 25W ballast	  
419	12V - 60W ballast	  





MODULE LENGTH	A	B
2640	576	500
2641	1076	1000
2642	1590	1514



### ACCESSORIES



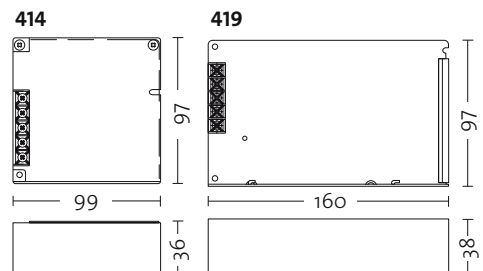










	<b>Galvanised steel recessed box</b>
946	For code 2640
947	For code 2641
983	For code 2642
	<b>Galvanised steel structure for false-ceilings</b>
976	For code 2640
977	For code 2641
988	For code 2642



33 anodised natural


NOTE

Floor-mounted recessed luminaire with LED light sources.  
 RGB technology.  
 Anodised extruded aluminium profile structure.  
 Louver in tempered glass (8 mm).  
 Silicone material gaskets.  
 Ballast not included.

CODE	DESCRIPTION	
<b>2640 RGB LED</b>	<b>Module 500 mm</b> 9 LED - 1W - 350 mA Colour: 33 - IP 67 - IK09 - 1000 kg static load - Kg 6.00 Ballast to be ordered separately Provided with length of cable 1000mm FROR 7x1mm <sup>2</sup>	  
<b>2641 RGB LED</b>	<b>Module 1000 mm</b> 18 LED - 1W - 350 mA Colour: 33 - IP 67 - IK09 - 1000 kg static load - Kg 6.00 Ballast to be ordered separately Provided with length of cable 1000mm HO7RN-F 4x1mm <sup>2</sup>	  
<b>2642 RGB LED</b>	<b>Module 1500 mm</b> 27 LED - 1W - 350 mA Colour: 33 - IP 67 - IK09 - 1000 kg static load - Kg 6.00 Ballast to be ordered separately Provided with length of cable 1500mm HO7RN-F 4x1mm <sup>2</sup>	  
<b>450</b>	<b>Remote control</b> It allows to switch on and off and to adjust the light intensity of the colour flow	
<b>451</b>	<b>RGB LED ballast</b> from 190V to 256V AC - 350 mA IP 40	   
	<b>Maximum connection of 3 luminaires code 2640 Rgb</b> <b>Maximum connection of 1 luminaires code 2641 Rgb</b> <b>Maximum connection of 1 luminaires code 2642 Rgb</b>	
<b>452</b>	<b>Receiver plus control</b> for RGB Led	
	<b>Maximum connection of 25 ballasts for LED Rgb code 451</b>	
<b>453</b>	<b>DMX 512 control unit</b> Max 6 channels	
<b>455</b>	<b>DMX interface</b>	
	<b>Maximum connection of 25 ballasts for LED Rgb code 451</b>	




MODULE LENGTH	A	B
<b>2640 RGB LED</b>	576	500
<b>2641 RGB LED</b>	1076	1000
<b>2642 RGB LED</b>	1590	1514

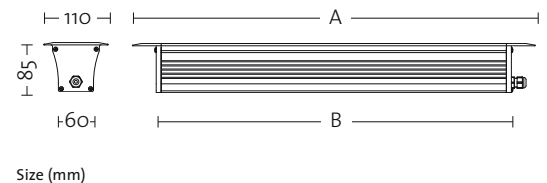


#### ACCESSORIES

<b>946</b>	<b>Galvanised steel recessed box</b> For code 2640 RGB LED
<b>947</b>	For code 2641 RGB LED
<b>983</b>	For code 2642 RGB LED
<b>976</b>	<b>Galvanised steel structure for false-ceilings</b> For code 2640 RGB LED
<b>977</b>	For code 2641 RGB LED
<b>988</b>	For code 2642 RGB LED



Recessed box



Frame

33 anodised natural

#### NOTE