


MICROLIGHT

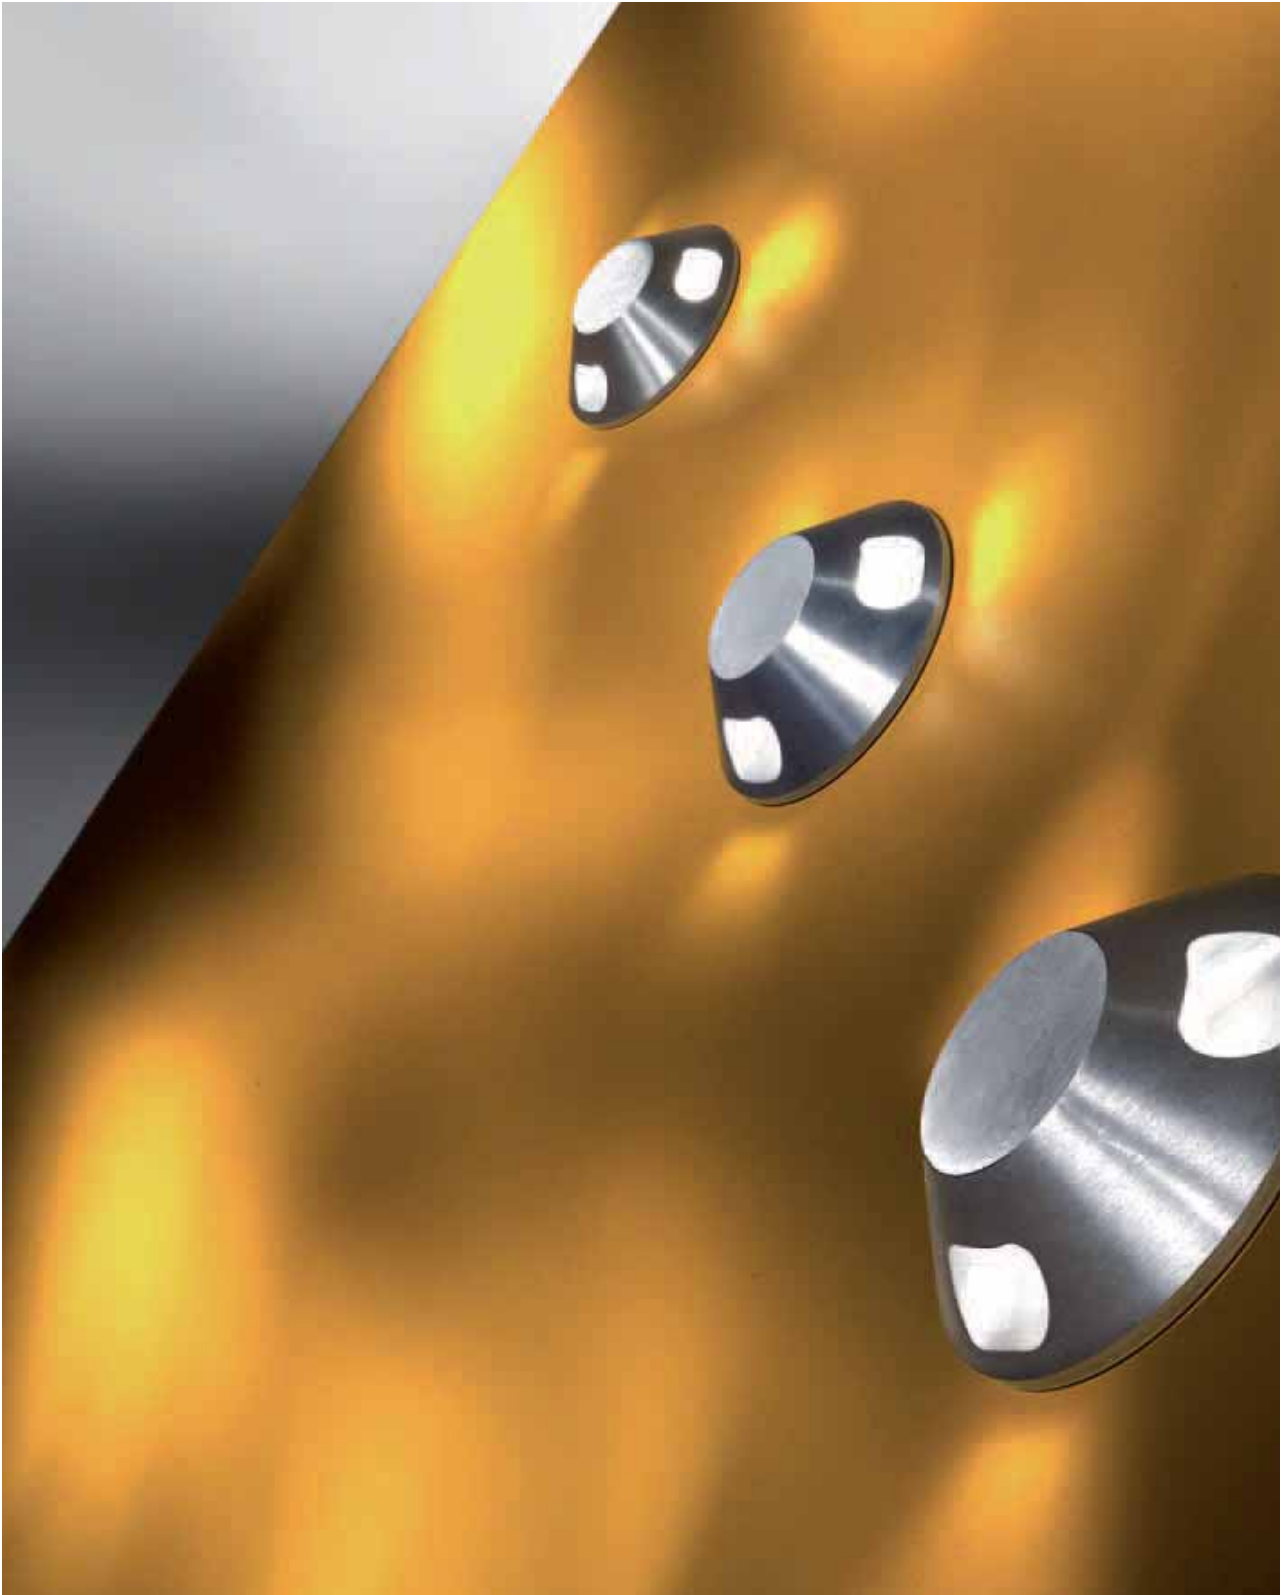

MICROLIGHT

DESIGN - QUATTROBI TECHNICAL DEPARTMENT

Even small objects can create unique light effects, both when they are used individually or in combination with others.

Purity and simplicity of design are the other characteristics of the new Microlight recessed spotlights, offered by Quattrobi with different shapes, functions and diffusion of light.

These luminaires based on the LED source technology ensure maximum comfort with a pleasant and expertly calibrated lighting, capable of creating the right atmosphere and decorative effects to enhance any type of environment, from the home to commercial spaces, such as stores, hotels, offices, health clubs.

The use of LED light sources ensure very long service life with significantly reduced consumption and virtually no maintenance, thus allowing installation even in hard to reach places.

Easy to install either on walls (in common branch boxes) or floor, these luminaires are made in insulation class III and are suitable for installation on normally inflammable surfaces.

Technical specifications

The Microlight luminaires are basically composed of two elements: a recessed part containing the light source, and an external part that serves as a light diffuser as well as performing a decorative function.

Versions differ depending on the type of installation.

Square, rectangular, round, with direct light, single light emission, double light emission, cross light emission, with full or half protection eyelid.

The full eyelid version can be floor-mounted by using a special cementing recessed box.

Different finishings of the external plates are available, with coated, chromium-plated, natural anodized versions.

Structural features


Installation: recessed

Luminaire housing: aluminium, stainless steel

Light sources: 1 Watt white LEDs

Standard finishing: white, black, chrome, natural-anodised

Protection class: IP40 and IP67

Insulation class: III 

Power supply: direct current stabilized at 350 mA

Optical components and light sources

The Microlight luminaires use white LEDs of 1W, 6.300 K, 100 lm and are powered by 350 mA stabilised direct current.




Square version available on request with an outer frame to be applied on the plate.




Recessed luminaires for wall, ceiling, and floor installation.
Lighting system with LED sources.


CODE	DESCRIPTION	Dimensions in mm
------	-------------	------------------

1522	1 white LED 1W - 350mA - 6300K - 100lm Colour: stainless steel IP 67 500 kg static load Ballast to be ordered separately Supplied with 25CM Ho5RN-F 2x1 mm ² output cable	
------	---	---




1523	1 white LED 1W - 350mA - 6300K - 100lm Colour: stainless steel IP 67 500 kg static load - kg 0.00 Ballast to be ordered separately Supplied with 25CM Ho5RN-F 2x1 mm ² output cable	
------	---	---



1524	With eyelid 1 white LED - 1W - 350mA - 6300K - 100lm Colour: stainless steel IP 67 Ballast to be ordered separately Supplied with 25CM Ho5RN-F 2x1 mm ² output cable	
------	---	---




1525	With eyelid 1 white LED - 1W - 350mA - 6300K - 100lm Colour: stainless steel IP 67 Ballast to be ordered separately Supplied with 25CM Ho5RN-F 2x1 mm ² output cable	
------	---	---



ACCESSORIES

800 Plastic recessed box
801 Aluminium recessed box for installation in brick walls (indoor use only)

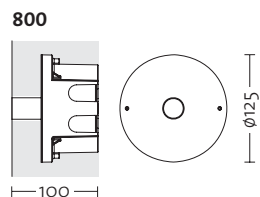

Dimensions in mm


52 stainless steel

NOTES


Recessed luminaires for wall, ceiling, and floor installation.
Lighting system with LED sources.

MICROLIGHT

DESIGN - QUATTROBI TECHNICAL DEPARTMENT

CODE	DESCRIPTION	Dimensions in mm
1520	1 white LED - 1W - 350mA - 6300K - 100lm Colour: stainless steel IP 67 Ballast to be ordered separately Supplied with 25CM HO5RN-F 2x1 mm ² output cable	




1521	1 white LED - 1W - 350mA - 6300K - 100lm Colour: stainless steel IP 67 Ballast to be ordered separately Supplied with 25CM HO5RN-F 2x1 mm ² output cable	
------	---	---



ACCESSORIES

- 800 Plastic recessed box
- 801 Aluminium recessed box for installation in brick walls (indoor use only)

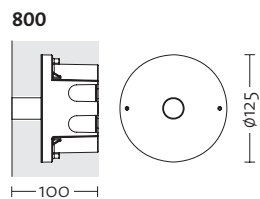

Dimensions in mm

52 stainless steel

NOTES