




- STAIRWAYS AND PATHWAYS
- ENTRANCE AREAS
- PEDESTRIAN PRECINCTS



MTR 90 Wall fitting with bracket.

Housing made of die-cast aluminium, aluminium, stainless steel, PMMA, painted, stainless steel screws, stainless steel threaded inserts for regularly used fixing positions, MTR 90-refractor, Ø: 90mm, H: 570mm, protection category IP54, protection class I with option class II, including wall bracket of die-cast aluminium and terminal block with fuse, painted, standard colour: black [-2].



Wall luminaire **SX 711** ■ ■ ■ - ■

TC-D*



MTR 90 refractor

	26W → 1 0	
	LVK → 8001	



MTR 90 Bollard with extended buried base.

Housing made of die-cast aluminium, aluminium, stainless steel, PMMA, painted, stainless steel screws, stainless steel threaded inserts for regularly used fixing positions, MTR 90-refractor, Ø: 90mm, H: 650/500mm or 1250/500mm, protection category IP54, protection class I with option class II, column without door with extended buried base and anti-sink plate □ 300mm². Terminal block with fuse, standard colour: black [-2]



Bollard **SX 710** ■ ■ ■ - ■

TC-D*




MTR 90 refractor
H: 650mm



MTR 90 refractor
H: 1250mm

	26W → 1 0	
	LVK → 8001	
	26W → 1 1	
	LVK → 8001	

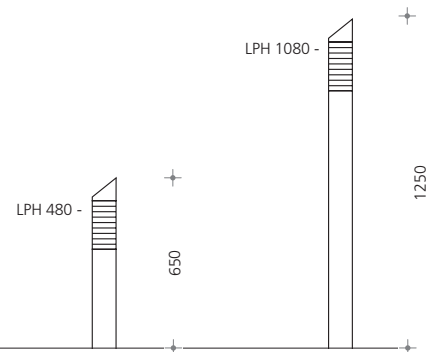

*26W: G24d-3 base

Please complete reference no. with the relevant codes for optics, lamp and colour.

Specification example:	MTR 90 Wall fitting SX 711 10 - 2	TC-D 26W / Bollard MTR 90 10	black - 2
-------------------------------	---	---	---------------------

Colour code: → ■ black - 2, choice of colours - 9