HAMS

→ PEDESTRIAN PRECINCTS
→ SQUARE AND CORPORATE HEADQUARTERS
→ ENTRANCE
→ PUBLIC PARKS
→ CAR PARKS

Hollow LightStack

Housing made of die-cast aluminium, aluminium, steel, stainless steel screws, stainless steel threaded inserts for regularly used fixing positions, PMMA satiné cylinder with a static light extractor unit, Ø: 230mm, H: 3500mm, protection category IP65, protection class I with option class II, column with door for mounting on plinth or separate buried base, supplied with IP 54 fuse box 2x5x16mm² for loop in-and-out, standard colour: silver [-3].

Hollow LightStack **SX 100-916-**
HIT-CE 70W, LVK 8068
Hollow LightStack **SX 100-917-**
HIT-CE 150W, LVK 8068

Please complete reference no. with the relevant colour code.

Specification example: **SX 100-9 1 6- 3**	**Hollow LightStack HIT-CE 70W SX 100-916**	**silver - 3**

Colour code: → silver - 3, choice of colours - 9

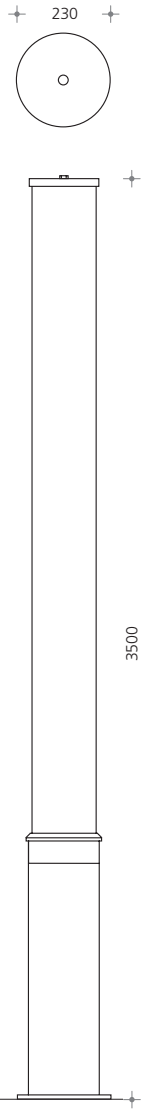

Buried base for Hollow LightStack of galvanised steel with flange and anti-sink plate, H: 800mm, anti-sink plate □ 300mm² **SX 97-073-0**

Buried bases p.324 • accessories p.325 • colours p.328 • planning aids p.332 • optics p.315

IP65 LVK → selux.de/lvk