

- CITY SQUARES
- ACCESS AND MINOR ROADS
- PEDESTRIAN PRECINCTS
- PUBLIC PARKS



RITORNO 2 Secondary reflector fitting for pole top Ø: 76mm with system-pole.


Housing made of die-cast aluminium, aluminium, stainless steel screws, stainless steel threaded inserts for regularly used fixing positions, symmetric secondary reflector made of Aluminium, inner surface of secondary reflector matte white, outer surface painted to match luminaire, cover of lamp housing designed as an inspection flap with convex toughened glass, Ø: 940mm, H: 1135mm, protection category: IP65, protection class I with option class II, cylindrical system-pole of galvanised steel, Ø: 76/90mm, painted, features extended buried base with anti-sink

plate set, CE-approval according to EU construction-product regulations, supplied with IP 54 fuse box 2x5x10mm² for loop in-and-out, pole height H: 4100/800mm, LPH: 5030mm, standard colour: graphite – mica finish [-4].

A_w: 0,17 m², weight: 16,8kg

Secondary reflector fixture

including system pole **SX 344** ■ ■ - ■



Secondary reflector optics **symmetric**

HIT-CE*

	35W → 1 4	
	LVK → 7674	
	70W → 1 2	
	LVK → 7674	
	100W → 1 1	
	LVK → 7674	
	150W → 1 0	
	LVK → 7674	

*G12 base

Please complete reference no. with the relevant codes for optic, lamp and colour.

Specification example:

SX 344 1 4 - 4

RITORNO 2

SX 344

HIT-CE 35W


1 4

graphite-mica finish - 4



Colour code:



graphite - mica finish - 4, choice of colours - 9



on request

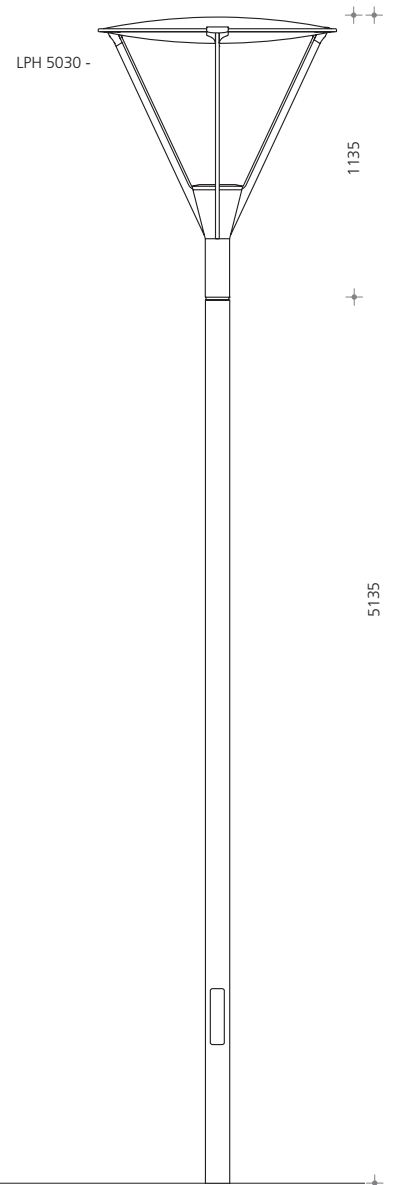

LVK → selux.de/lvk



DEBENHAMS

NEXT