

- MAIN ROADS
- COURTYARDS
- INDUSTRIAL AREAS
- FAIRS



URBI 2 Type 600 Bracket mounted fitting for attachment to URBI 2 System-Poles.

Housing made of die-cast aluminium, aluminium, stainless steel, stainless steel screws, stainless steel threaded inserts for regularly used fixing positions, upper cover PC - pearl finish, diffuser clear PC, features tool-free easy maintenance access with flush one hand operated lock, choice of symmetric or asymmetric high performance mini-road reflector optics-VARIO-OPTIC for all layouts, for planning assistance please contact se'lux, L: 630mm, B: 390mm, H: 210mm, protection category IP65, protection class I with

option class II, standard colour: anthracite grey [-6].

A_w: 0,096 m², weight: 11,5 kg
Pathway fitting Type 600 SX 845 ■■■ - ■
 for URBI 2 System-Poles




VARIO-OPTIC
 Mirror optics
asymmetric



Mirror optics
symmetric

HST	HIT-CE	
50W → 3 0 LVK → 7898	35W* → 3 1 LVK → 7900	
70W → 3 2 LVK → 7898	70W → 3 3 LVK → 7900	
50W → 4 0 LVK → 7897	35W* → 4 1 LVK → 7899	
70W → 4 2 LVK → 7897	70W → 4 3 LVK → 7899	




URBI 2 Type 750 Bracket mounted fitting for attachment to URBI 2 System-Poles.

Housing made of die-cast aluminium, aluminium, stainless steel, stainless steel screws, stainless steel threaded inserts for regularly used fixing positions, upper cover PC - pearl finish, diffuser clear PC, features tool-free easy maintenance access with flush one hand operated lock, choice of symmetric or asymmetric high performance mirror optics - VARIO-OPTIC for all layouts, for planning assistance please contact se'lux, L: 740mm, B: 440mm, H: 230mm, protection category IP65, protection class I with option class II,


standard colour: anthracite grey [-6].

A_w: 0,12 m², weight: 12 kg
Pathway fitting Type 750 SX 825 ■■■ - ■
 for URBI 2 System-Poles




VARIO-OPTIC
 Mirror optics
asymmetric

HST	HIT-CE	
50W → 4 4 LVK → 7907	35W* → 3 1 LVK → 7908	
70W → 4 0 LVK → 7907	70W → 3 2 LVK → 7908	
100W → 4 1 LVK → 7907	100W → 3 3 LVK → 7908	
150W → 4 2 LVK → 7907	150W → 3 0 LVK → 7908	



Wall bracket P. 232



*35W G12 base • on request with Philips CosmoPolis (HIT-COS).
 Please complete reference no. with the relevant codes for optics, lamp and colour.

- MAIN ROADS
- COURTYARDS
- CITY SQUARES



URBI 2 Type 1000 Bracket mounted fitting for attachment to URBI 2 System-Poles.

Housing made of die-cast aluminium, aluminium, stainless steel, stainless steel screws, stainless steel threaded inserts for regularly used fixing positions, upper cover PC - pearl finish, diffuser clear PC, features tool-free easy maintenance access with flush one hand operated lock, asymmetric high performance mirror optics - VARIO-OPTIC for all layouts, for planning assistance please contact se'lux, L: 985mm, B: 458mm, H: 305mm, protection category IP65, protection

class II with option class I, standard colour: anthracite grey [-6].


A_w: 0,217 m², weight: 13,5 kg
Roadway fitting Type 1000 SX 830 for URBI 2 System-Poles



VARIO-OPTIC

Mirror optics asymmetric

HST	HIT-CE	
100W → 5 2 LVK → 7913	100W → 3 2 LVK → 7914	
150W → 5 0 LVK → 7913	150W → 3 0 LVK → 7914	
250W → 5 1 LVK → 7913	250W → 3 1 LVK → 7914	




*35W G12 base • on request with Philips CosmoPolis (HIT-COS).
 Please complete reference no. with the relevant codes for optics, lamp and colour.

Specification example: URBI Fitting with System-Pole, Buried Base and Secondary Bracket

URBI 2 Typ 1000 SX 830	HST 100W 5 2	anthracite grey - 6	SX 830 5 2 - 6
System-Pole SX 187 23	H: 7800/200mm	- 6	SX 187 23 - 6
Buried base SX 97-051	H: 1600mm	- 0	SX 97-051 - 0
Secondary Bracket SX 97-100		- 6	SX 97-100 - 6

Colour code: → anthracite grey - 6, choice of colours - 9



Wall bracket P. 232



- MAIN ROADS
- COURTYARDS
- INDUSTRIAL AREAS
- FAIRS

URBI 2 System-Pole featuring **Roadway / Walkway combination** with selection of URBI 2 fittings.

Conical galvanised steel pole with flange plate, □ 350mm x 25mm along with Ø: 48mm tubular loop brackets with lateral flange plates, featuring 4 URBI Fixation Points on multiple height levels, cast aluminium two-part base cover and decorative pole top ring, painted, ring painted silver, CE-approval according to EU construction-product regulations, supplied with IP54 fuse box 2x5x16mm² for loop in-and-out, painting for pole components on request,

Roadway / Walkway pole 1+1

H: 7800/200mm, LPH: 6700

SX 191 23- ■

Roadway / Walkway pole 1+1

H: 8960/200mm, LPH: 7860


SX 192 23- ■

Buried base for URBI System-Poles made of galvanised steel with flange and anti-sink plate, (up to LPH 6700mm)

H: 1600mm, flange plate □ 350mm², anti-sink plate □ 450mm² **SX 97-051- 0**

Buried base for URBI System-Poles made of galvanised steel with flange and anti-sink plate, H: 1800mm featuring anti-rotation stabilizer

H: 1800mm, flange plate □ 350mm², anti-sink plate □ 450mm² **SX 97-055- 0**

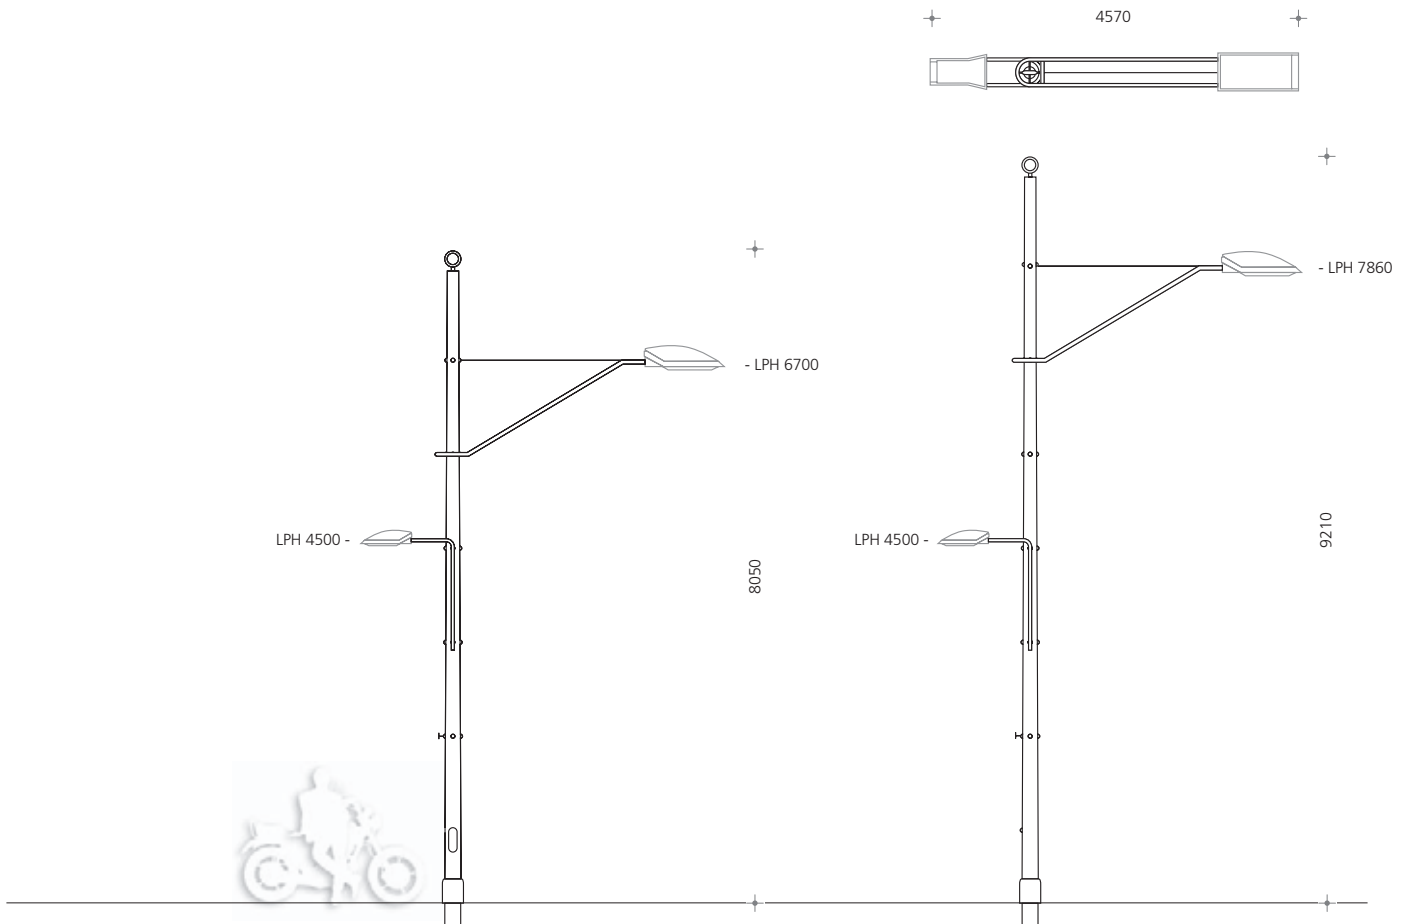

Secondary brackets and additional URBI accessories p.266 • colours p.328 • buried bases p.324

