

# Insert



Colonnina in acciaio inox verniciata a polveri poliestere ad alta resistenza con sorgente a fluorescenza a luce diretta. Diffusore in vetro temprato e serigrafato.

Pillar style light fixture in stainless steel with high-resistance polyester powder paint finish, fitted with direct light fluorescent bulb. Screen-printed toughened glass diffuser.

Baliza de acero inoxidable pintada con pintura en polvo poliéster de alta resistencia con fuente luminosa fluorescente de luz directa. Difusor de vidrio templado y serigrafiado.

Colonne en acier inox peint par poudre polyester haute résistance avec source fluorescente à éclairage direct. Diffuseur en verre trempé et sérigraphié.

Robuste Pollerleuchte Gehäuse aus pulverbeschichtetem Edelstahl für Kompaktleuchtstofflampe. Lichtdiffusor aus bedrucktem und gehärtetem Glas.

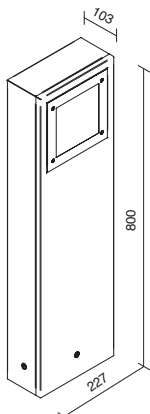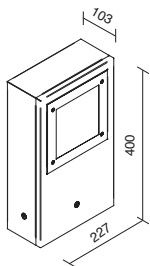

FINISH	CODE	LAMP	ELECTRIFICATION
--------	------	------	-----------------



C5

**61005**



TC-TEL Gx24q-2 18W - 240V

Weight Kg. 4,4  
Volume m<sup>3</sup> 0,015



C5



**61015**








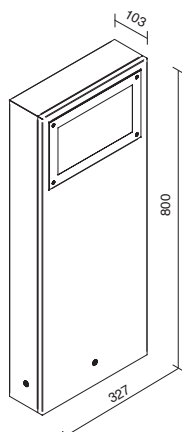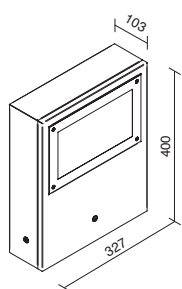


TC-TEL Gx24q-2 18W - 240V







Weight Kg. 6,3  
Volume m<sup>3</sup> 0,037





FINISH	CODE	LAMP	ELECTRIFICATION
--------	------	------	-----------------

	 <b>61025</b>		TC-DEL G24q-3 26W - 240V
Weight Kg. 5,4 Volume m <sup>3</sup> 0,026			 IP 65  850°  

	 <b>61035</b>		TC-DEL G24q-3 26W - 240V
Weight Kg. 7,8 Volume m <sup>3</sup> 0,050			 IP 65  850° 