

Wall fittings and free-standing luminaires


SQUARE SX 675 003 436



Free-standing luminaire with EB for compact fluorescent lamps 4x TC-L/36 W

10% direct - 90% indirect,
 Lower cover with slit openings backed with a diffuser,
 Aluminium housing, All visible vertical surfaces of stainless steel,
 Two-level switching,
 Mains lead,
 Colour: Silver RAL 9006
 B: 450mm, H: 41mm, L: 480mm
 total height T: 1950mm
 Weight: 24,6 kg


Manufacturer: SELUX
Typ: SX 675 003 436

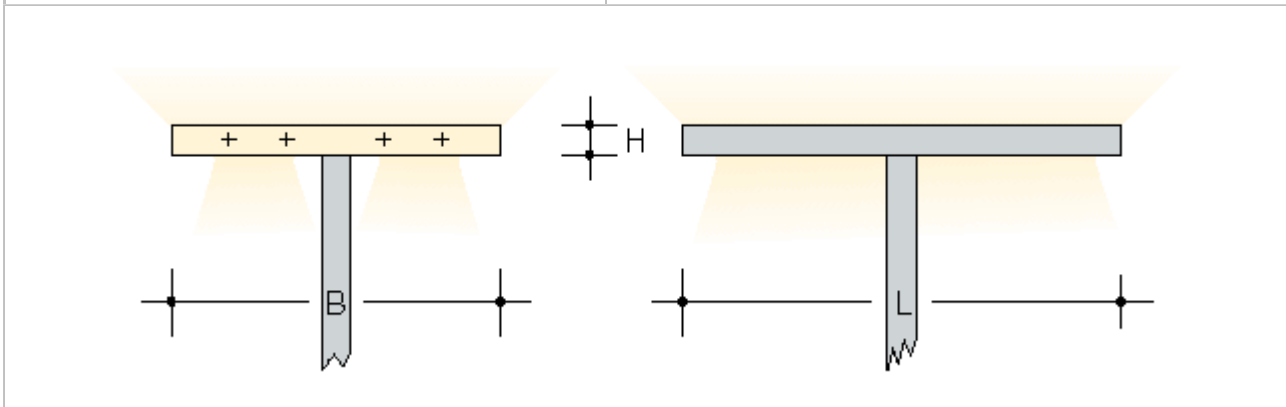

Length L: 480mm
 Width B: 450mm
 Height H: 41mm

Photometric data:

5557-36

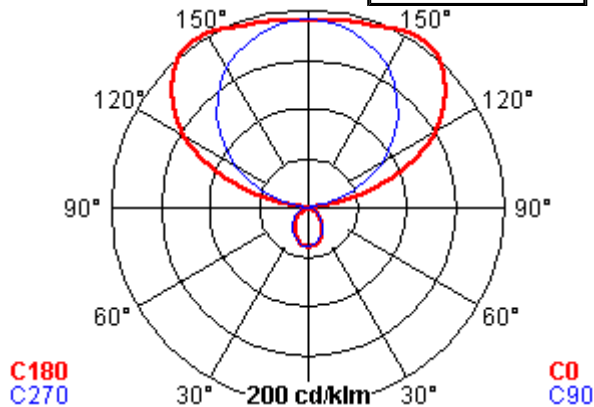

Lamp: 4 x TC-L/36 W (2900 lm)
 Electronic ballast
 Connected load: 152 W
 Light output ratio: 77,4 %
 suitable for office workplaces with DSE (screens according class I and II, ISO 9241-7); $L < 1000 \text{ cd/m}^2$ above 65° radially around
 Light distribution: 10% direct - 90% indirect,
 $I_{\text{max}}(145^\circ) 210 \text{ cd}/1000 \text{ lm}$
 shielding: Quality grade A (1000lx)
 UGR: < 13 (Parallel)/ < 13 (Vertical)



IP20

se'lux INTERIOR

Wall fittings and free-standing luminaires


SQUARE SX 675 003 455



Free-standing luminaire with EB for compact fluorescent lamps 4x TC-L/55 W

10% direct - 90% indirect,
 Lower cover with slit openings backed with a diffuser,
 Aluminium housing, All visible vertical surfaces of stainless steel,
 Two-level switching,
 Mains lead,
 Colour: Silver RAL 9006
 B: 450mm, H: 41mm, L: 600mm
 total height T: 1950mm
 Weight: 24,6 kg


Manufacturer: SELUX
Typ: SX 675 003 455

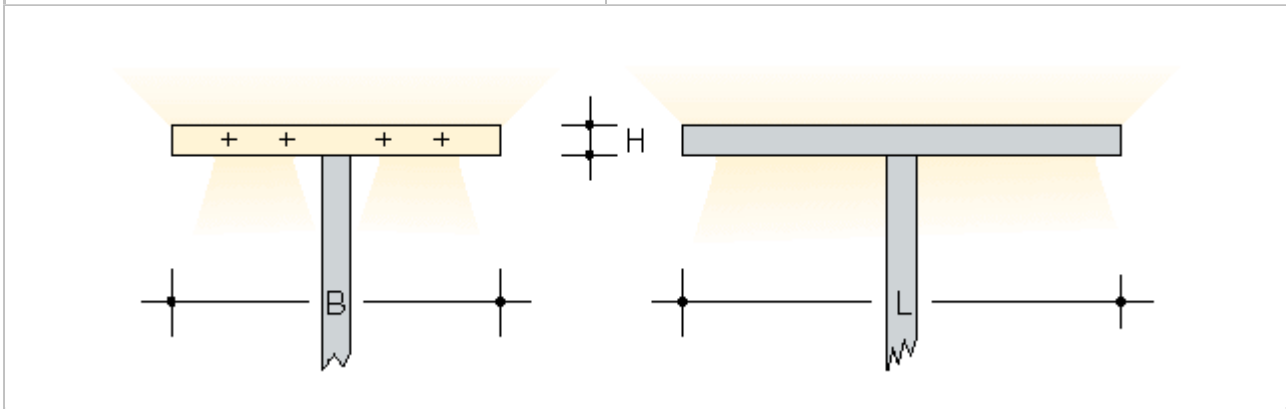

Length L: 600mm
 Width B: 450mm
 Height H: 41mm

Photometric data:

5557-55

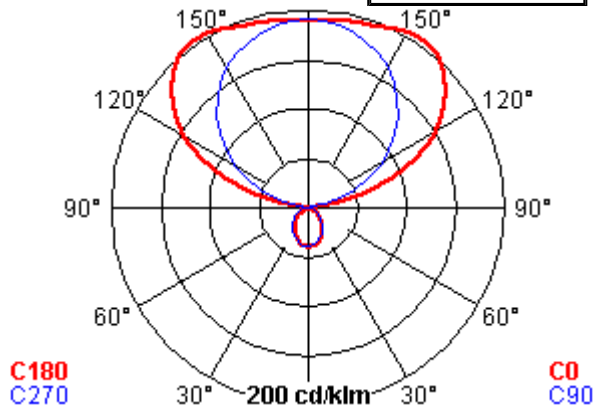

Lamp: 4 x TC-L/55 W (4800 lm)
 Electronic ballast
 Connected load: 244 W
 Light output ratio: 77,4 %
 suitable for office workplaces with DSE (screens according class I and II, ISO 9241-7); $L < 1000 \text{ cd/m}^2$ above 65° radially around
 Light distribution: 10% direct - 90% indirect,
 $I_{\text{max}}(145^\circ) 210 \text{ cd/1000lm}$
 shielding: Quality grade A (1000lx)
 UGR: < 13 (Parallel)/ < 13 (Vertical)



IP20

se'lux INTERIOR