




Joy



Residential, Urban Lighting

"JOY" is an extremely versatile waterproof (IP65 protection level) ceiling/wall light. Suitable for corridors, porches, balconies, gardens, etc. and with particular technical characteristics. The two different sizes and vast range of lamps that can be inserted satisfy all types of lighting requirements. Simple and quick to install, the light cover just snaps into place.

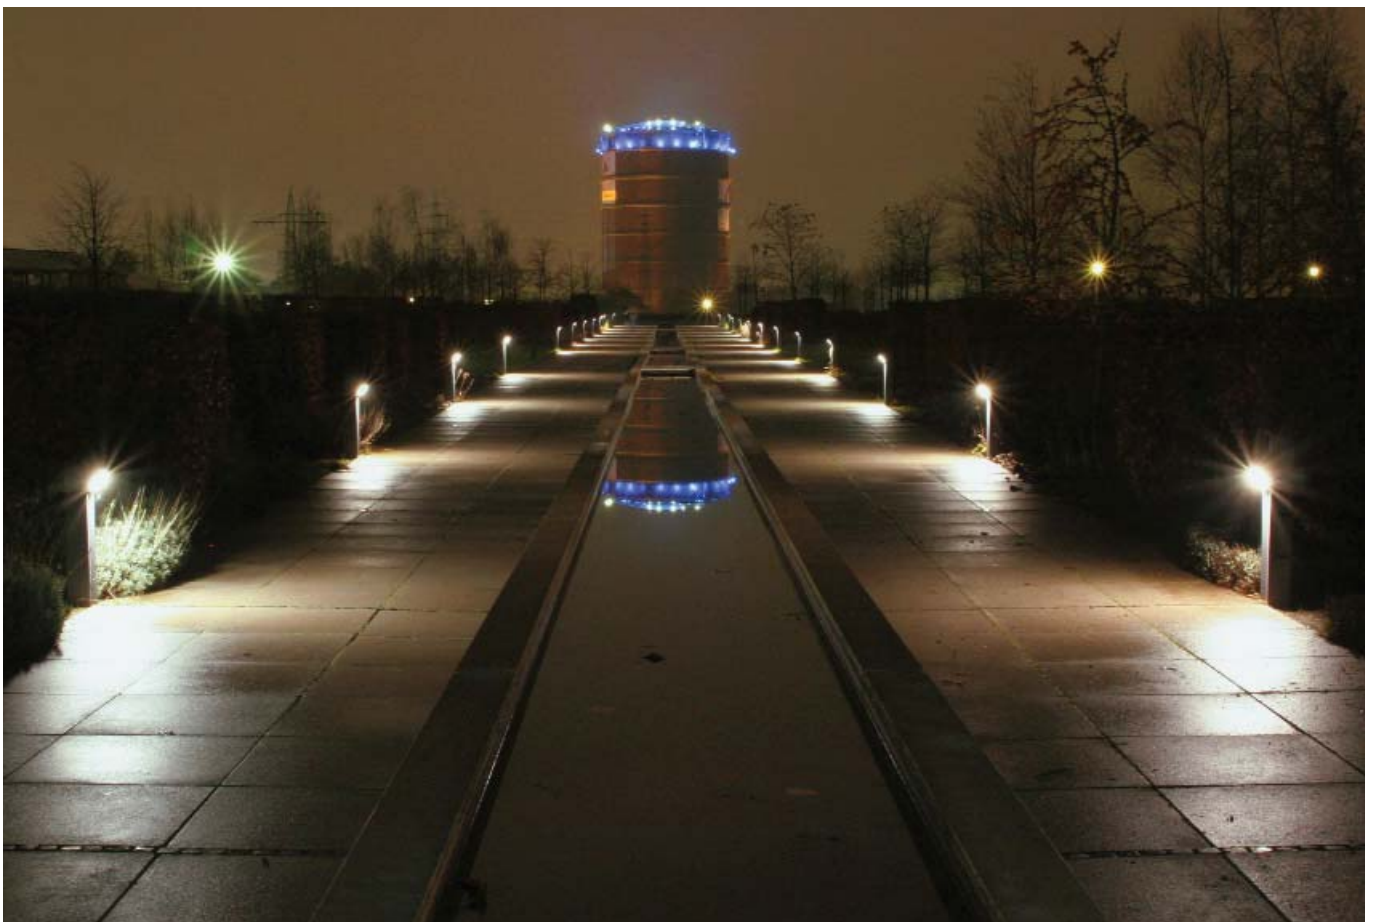

A5610NE



Lamps not included.

Code	Lamps Watt	A mm	B mm	C mm	
A5602 BI•GR•NE	2x9	195	180	240	FSD G23
A5604 BI•GR•NE	1x9	195	180	240	
A5607 BI•GR•NE	1x40	195	180	240	IBP E27
A5610 BI•GR•NE	2x18	250	220	310	FSD 2G11
A5612 BI•GR•NE	2x11	250	220	310	FSD G23
A5614 BI•GR•NE	1x18	250	220	310	FSD 2G11
A5617 BI•GR•NE	1x60	250	220	310	IAA E27

Code	Lamps Watt	A mm	B mm	C mm	emergency continuous light
A5614/E BI•GR•NE	1x11	250	220	310	FSD 2G7

Code	Lamps Watt	A mm	B mm	C mm	only emergency
A5614/SE BI•GR•NE	1x11	250	220	310	FSD 2G7



pag. 363

Indoor or outdoor light fittings IP 65.

Body in white, black or grey thermoplastic material provided with sealing rubber and duct for cable passage Ø 8 mm.

Reflector in white thermoplastic material. Wiring tray.

Diffuser in opal metacrylate fixed on the body with 2 hooks.


Wiring for incandescent or electronic lamp (Ømax 50 mm and L max 140 mm for little Joy, Ø max 55 mm and Lmax 160 mm for big Joy) E27 or starter wiring 230V-50 Hz for fluorescent lamps, electrical components with ENEC approval. Rigid cable

H05V2-U section 0,75 mm² (CEI 20-20). Socket terminal 2P (section max 2,5 mm²). Installations wall, ceiling or pole Ø 60 mm. Vertically with accessory A550.

Accessories provided screws and fastening nogs.

Accessories on request: pole Ø 60 mm. A580 or A581 and base for pole A560. In accordance with standard IEC 598, CEI EN 60598-1 (CEI 34-21).

Emergency wiring in accordance with standard CEI EN 60598-2-22 (CEI 34-22).

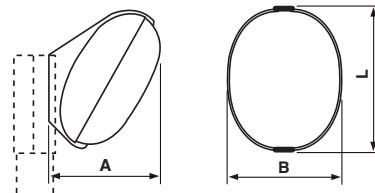

Colours



Joy Accessories

A550NE




Colours

BI 

GR 

NE 



Code

A550 BI•NE•GR

Accessory for pole fixing.

Accessory for pole fixing (Pole diameter \varnothing 60 mm). Thermoplastic: black (NE), white (BI), grey (GR).


A560NE



Colours

GR 

NE 



Code

A560 NE•GR

Accessory for pole fixing.

Base for pole \varnothing 60 mm (Hmax 1200 mm); black (NE), grey (GR).


A580NE



Colours

GR 

NE 



Code

	L mm
A580 NE•GR	1200
A581 NE•GR	1800

Fiberglass pole \varnothing 60 mm.

